

# Impact of optical phase conjugation on the nonlinear Shannon limit

A.D. Ellis\*, and M.E. McCarthy

Aston Institute of Photonic Technologies, Aston University, Aston Triangle, Birmingham, B47ET, United Kingdom  
andrew.ellis@aston.ac.uk

**Abstract:** Compensation of the detrimental impacts of nonlinearity on long haul wavelength division multiplexed system performance is discussed, and the difference between transmitter, receiver and in-line compensation analyzed. The impact of system imperfections is also outlined.

**OCIS codes:** (000.0000) General; (000.0000) General [8-pt. type] For codes, see <http://www.osapublishing.org/submit/ocis/>

## 1. Introduction

The perception of the nonlinear Shannon limit [1] is currently seen as preventing the continued smooth (exponential) increase of optical transmission throughput, resulting in a predicted capacity crunch [2]. The focus of the research community on these issues has resulted in specific international discussion meetings [e.g. 3] and even significant inducement prizes [4]. One of the earliest proposals to compensate for nonlinear impairments in an optical transmission system was the use of optical phase conjugation (OPC) [5,6]. In an OPC system, the entire signal is phase conjugated after a certain length of a transmission system. If the signal is then propagated through an identical length, subject to certain symmetry conditions, nonlinear effects and even ordered dispersive effects are reversed. If the symmetry conditions are not met, then partial compensation of the impairments is still possible [7]. Following early work on direct detection systems [e.g. 8-10] which were severely constrained by nonlinearity, recent attention has focused on the digital signal processing capabilities enabled by nested Mach-Zhender modulators [11] and digital coherent receivers [12]. However, as we approach the nonlinear Shannon limit there is renewed interest in the direct compensation of nonlinear impairments. In this paper, we review recent progress in the use of optical conjugation for the mitigation of nonlinear impairments in both serial and parallel configurations, and estimate the extent to which each technique may enable transmission beyond the nonlinear Shannon limit.

## 2. Parallel conjugated copies

Simulations have shown digital back propagation to be a useful technique [13], resulting in transmission performance limited by interactions between signal and noise [14] or by polarization mode dispersion [15]. However, implementation is complex, multiplying the digital equalizer complexity by several factors. This complexity increases rapidly if compensation over multiple channels is performed [16]. It has been recently proposed to transmit polarization multiplex two signals and their phase conjugated copies over the same transmission line [17]. This so called Polarization Time Coding was shown through numerical simulations to be resistant to the nonlinear effect of polarization scattering. Recently this concept has been generalized and experimentally demonstrated using a single data channel and its conjugate copy [18-23]. The copy may be multiplexed in any available dimension, including polarization [18, 19], wavelength channel [20], time [21] and subcarrier frequency [22,23]. Ideally the signal and its conjugate copy would experience identical (or deterministically scaled) nonlinear impairments, and would accumulate statistically independent amplified spontaneous emission (ASE) noise. At the receiver, the conjugated copy is re-conjugated and added to the original signal. Since ASE noise is uncorrelated, but since the two copies of the signal are correlated the signal to noise ratio is increased by 3dB (this principle applies to an arbitrary number of copies). The anti-correlated nonlinear effects add destructively and the deterministic nonlinear impairments are in principle fully cancelled. Ideally, this results in an improved signal to noise ratio of  $2 (3/2 snr_0)^{3/2}$ , where  $snr_0$  is the signal to noise ratio of one uncompensated copy, or an improvement of 5.6 dB plus 50% of the original  $snr$  in dB [24]. Note that 3dB of this improvement arises from sending an additional copy, effectively doubling the signal bandwidth. Consequently, despite the attractively simple signal processing (a few additions and phase inversions) net benefit from this approach is only achieved for original signal to noise ratios below 5dB.

The range of systems where transmission of a conjugate copy enhances performance may clearly be improved by reducing the additional bandwidth required. This may be achieved by only transmitting one conjugate for every  $n^{\text{th}}$  data signal and, provided the nonlinear impairments are sufficiently identical as is the case for adjacent channels in an OFDM system, estimate the nonlinear impairment on other channels [22,23]. Clearly the nonlinear mitigation is somewhat less than conjugating every signal, but due to the reduced excess bandwidth net performance gains in the

region of 1.5dB have been observed. A more straightforward approach is of course the conjugate coding of pairs of signals [25,26] fully generalizing the 2x2 MIMO approach of [17]. This approach maintains the full nonlinearity mitigation benefit, but loses the signal to noise ratio benefit of coherent superposition [27] available when only one signal and its conjugate are used. In this case the maximum potential signal-to-noise ratio gain is simply  $(3/2 snr_0)^{3/2}$ , and benefits are observed for all uncompensated signal-to-noise ratios.

Transmitter configurations may be simplified by the use of four wave mixing devices to generate appropriate conjugate copies [19,28], simultaneously generating all of the required conjugate copies. At the receiver, a phase sensitive amplifier, which essentially interferometrically combines an input signal and idler (the signals conjugate copy), may be used to perform the required coherent addition [28,29], although pump phase locking is required [30]. By combining all optical conjugate copy generation and receiver processing, the combined benefits of nonlinearity mitigation and reduced noise figure are simultaneously achieved [31], such that the signal to noise ratio gain over a conventional single channel system using phase insensitive amplifiers would approach  $4(3/2 snr_0)^{3/2}$ .

### 3. Serially generated conjugates

Alternatively, we can consider manipulating the signal in the transmission link using OPCs; this allows implementation using shared optical resources, full modulation format transparency and, more significantly, the disruption of parametric noise accumulation. [14,31]. Optimization of performance requires careful design to ensure symmetry in power profile and dispersion in each segment of the transmission link. The simplest configuration is to place an OPC in the middle of the transmission path [5-10]. This can lead to a  $snr$  gain of up to  $(3snr_0)^{3/2}/2$  equivalent to a  $1.89 snr_0^{1/3}$  reach enhancement [37]). However for an EDFA only system mid-span placement leads to dispersion-power asymmetry [38] which needs to be compensated or ultra-flat Raman amplification used [32, 39]. Practical demonstrations of this have been reported with significant performance enhancements for WDM systems with reasonable transmission symmetry in power [32-34] and dispersion [35]. Nonlinearity compensation of a total bit rate 2.4Tbit/s using a single dual-band OPC allows a ~50% increase in reach for 6 simultaneously transmitted 400Gbit/s 16QAM super-channels with an 18% power asymmetry (75 km link length) over standard single mode fiber [37]. Transmission over dispersion shifted and flattened fiber, using Raman amplification and a single OPC has enabled a significant 3dB increase in the margin of a 2000 km  $4 \times 67.25$ Gbaud-16QAM WDM system.

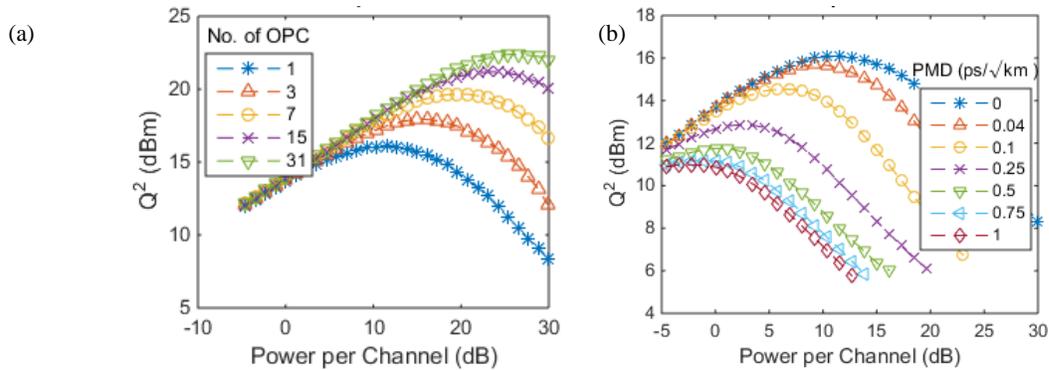


Fig. 1. 5 Channel 28 GBaud Nyquist PM-QPSK transmission over 32 x80 km of standard single mode fiber considering ideal OPC and Raman amplification using  $10 \times 2^{12}$  symbols (a) Performance improvement achieved by disruption of parametric noise amplification by between one (blue) and 31 (green) OPCs distributed symmetrically along the link (b) Performance of single OPC system subject to statistical asymmetry induced by PMD, showing PMD free (blue), spun fiber (red triangle), typical fiber (orange) and various higher levels.

In order to provide greater performance benefits, multiple OPCs have been shown to increase the  $snr$  to  $(N_{OPC}+1)^{1/2}(3/2 snr_0)^{3/2}$ , where  $N_{OPC}$  is the number of symmetrically deployed OPC [31]. The additional performance gain is due to the prevention of the quadratic growth of parametrically amplified noise. Cascadability of OPCs has been demonstrated using fiber based OPCs [34,36]. Ten OPC operations (once every 600 km) enabled a net 2.5 dB increase in  $snr$  after accounting for an OSNR implementation penalty of ~2.4 dB [36] consistent with analytical predictions [31]. The OSNR penalty may be normalized out using appropriate reference configurations [34] allowing an 8dB increase in the optimum launch power to be achieved. The 14.4dB theoretical maximum increase in launch power, given by  $(6(N_{OPC}+1)snr_0)^{1/2}$ , is only slightly higher than the observed value, although due to the OSNR performance of the loop the performance improvement was a modest 1dB (theoretically 13.2dB).

While power and dispersion symmetry can be predicted and controlled [38], statistical properties of using a real transmission link for signal and conjugate transmission will result in an unforeseeable asymmetry. This will limit the

effectiveness of non-linear compensation possible [37]. For a 200 GHz bandwidth 16QAM Nyquist WDM signal with ideal power and dispersion symmetry, a typical PMD coefficient of  $0.1\text{ps}/\sqrt{\text{km}}$  would reduce the reach enhancement to only ~50%. PMD is also a significant restriction for the effectiveness of digital back propagation [16], which is also constrained by the available signal processing bandwidth [40]. To illustrate the disruption of parametric noise amplification and the effect of PMD and, we have numerically simulated, using VPI and Matlab, transmission of 5 Nyquist PM-QPSK channels over 2,560 km. Details of the DSP used are available in [31]. Fig. 1a shows performance when serially concatenated conjugations are performed along the transmission link, confirming the 7dB analytically predicted performance improvement for the use of 31 OPCs. Fig. 1b shows that the performance benefit is degraded by PMD. For typical low PMD fiber ( $0.1\text{ps}/\sqrt{\text{km}}$ ), there is a 1.5 dB reduction in the performance gain and for large values of PMD the benefit of the OPC is almost completely eroded. This penalty will increase with system bandwidth and will be a critical design parameter for future OPC based systems [37].

#### 4. Conclusions.

We have outlined the potential benefits of conjugation (co-propagated and serially) to compensate deterministic non-linearity and so provide performance beyond the nonlinear Shannon limit. These benefits do not come without a cost; either in overhead, link design or DSP complexity; but these problems are not insurmountable.

#### Acknowledgements

This work was partially supported by the EPSRC projects EP/J017582/1 & EP/L000091/1 (UNLOC & PEACE).

#### 5. References

- [1] A.D.Ellis et al., "Approaching the Non-linear Shannon Limit", *JLT*, **28**, 2010.
- [2] D.J.Richardson, "Filling the Light Pipe", *Science* **330**, 2010.
- [3] A.D.Ellis et al., "Communication Networks beyond the Capacity Crunch", submitted to Phil. Trans. R. Soc. A.
- [4] European Commission, <http://ec.europa.eu/research/horizonprize/index.cfm?prize=optical-transmission>, downloaded 17<sup>th</sup> Sept 2015.
- [5] D.M.Pepper, A. Yariv, "Compensation for phase distortions in nonlinear media by phase conjugation", *Opt. Lett.*, **5**, 1980.
- [6] R.A.Fisher et al., "Optical phase conjugation for time-domain undoing of dispersion self-phase modulation effect" *Opt.Lett.*, **8**,12,1983.
- [7] P. Minzioni et al., "Experimental demonstration of nonlinearity and dispersion compensation in an embedded link ...", *PTL*, **18**, 2006
- [8] A.H.Gnauck et al., "Transmission of two wavelength-multiplexed 10 Gbit/s channels over 560 km of dispersive fibre", *Elect Lett*, **30**,9,1994
- [9] S.Watanabe, M.Shirasaki, "Exact compensation for both chromatic dispersion and Kerr effect ... optical phase conjugation", *JLT*, **14**, 1996.
- [10] D.D. Marcenac et al., "40 Gbit/s transmission over 406 km of NDSF using mid-span spectral inversion ...", *Elect. Lett.*, **33**,10,1997.
- [11] D. McGhan et al., "5120 km RZ-DPSK transmission over G652 fiber at 10 Gb/s with no optical ...", *OFC'05*, PDP27.
- [12] M. G. Taylor, "Coherent detection method using DSP for demodulation of signal and subsequent ...", *PTL* **16**, 2, 2004.
- [13] K-P.H. J.M.Kahn, "Electronic compensation technique to mitigate nonlinear phase noise", *JLT*, **22**, 2004.
- [14] D. Rafique and A. D. Ellis, "Impact of signal-ASE four-wave mixing on the effectiveness of digital ...", *Opt. Express*, **19**, 2011
- [15] G. Gao et al., Influence of PMD on fiber nonlinearity compensation using digital back propagation, *Opt. Express*, **20**, 2012.
- [16] G. Liga et al., "On the performance of multichannel digital backpropagation in high-capacity long-haul..." *Opt. Expr.*, **22**, 24,2014.
- [17] Y. Han, G. Li. "Polarization diversity transmitter and optical nonlinearity mitigation using polarization-time coding", *COTA 2006*.
- [18] X. Liu, et al. "Phase-conjugated twin waves for communication beyond the Kerr nonlinearity limit." *Nature Photonics* **7**,7, 2013.
- [19] H. Lu et al. "Novel polarization-diversity scheme based on mutual phase conjugation for fiber-nonlinearity mitigation ...", *ECOC 2013*.
- [20] Y. Tian et al. " ... Conjugated Copy and Digital Phase-Sensitive Boosting with Enhanced Noise and Nonlinearity Tolerance", *OFC 2013*.
- [21] H. Eliasson et al., "Mitigation of nonlinearities using conjugate data repetition", *Opt. Express*, **23**, 2015
- [22] S. T. Le, et al, "Phase-conjugated Pilots for Fibre Nonlinearity Compensation in CO-OFDM Transmission", *ECOC'14*, We.2.3.1
- [23] X.Yi et al. "Experimental demonstration of digital coherent superposition of optical OFDM subcarrier pairs ...", *OFC 2014*
- [24] A.D. Ellis, et al., "The Impact of Phase Conjugation on the Nonlinear-Shannon Limit", *ICTON 2015*, WeD1.5, 2015
- [25] S. T. Le et al., "Demonstration of Phase-conjugated Subcarrier Coding for Fiber Nonlinearity Compensation...", *JLT*, **33**,11, 2015.
- [26] T.Yoshida et al. "Spectrally-efficient dual phase-conjugate twin waves with orthogonally multiplexed quadrature ... signals." *OFC 2014*.
- [27] Shahi et al., "Reduction of nonlinear impairments in fiber transmission system using fiber diversity", *SPPCom2011* SPWA3
- [28] S.L. Olsson et al. "Phase-sensitive amplified optical link operating in the nonlinear transmission regime." *ECOC 2012*.
- [29] B. Corcoran et al., "Mitigation of nonlinear impairments on QPSK data in phase-sensitive amplified links", *ECOC 2013*
- [30] S.L.I. Olsson et al., "Injection-Locking Based Pump Recovery for Phase-Sensitive Amplified Links," *Opt. Express.*, **21**, 12, 2013
- [31] H. Eliasson et al., "Comparison between coherent superposition in DSP and PSA for mitigation of nonlinearities ...", *ECOC 2014*.
- [32] D. Rafique et al. "Various nonlinearity mitigation techniques employing optical and electronic approaches", *PTL*, **23**(23), 2011.
- [31] A. D. Ellis et al., "Capacity limits of systems employing multiple optical phase conjugators", *Opt. Express*, **23**, 16, 2015..
- [32] I. Sackey et al., "Kerr Nonlinearity Mitigation: Mid-Link Spectral Inversion versus Digital Backpropagation ...", *JLT*, **33**, 9, 2015.
- [33] I. Sackey et al., "Kerr nonlinearity mitigation in  $5 \times 28$ -GBd PDM 16-QAM signal transmission ...", *Opt. Express*, **22**, 22, 2014.
- [34] K.Solis-Trapala et al., "Transmission Optimized Impairment Mitigation by 12 Stage Phase Conjugation ...", *OFC 2015*, Th3C.2.
- [35] K.Solis-Trapala et al., "Nearly-ideal optical phase conjugation based nonlinear compensation system", *OFC 2014*, paper W3F.8.
- [36] H. Hu et al., "Fiber nonlinearity compensation of an 8-channel WDM ... signal using multiple phase conjugations", *OFC 2014* M3C.2.
- [37] A.D.Ellis et al., "4 Tbit/s transmission reach enhancement using 10x400 Gbit/s super-channels ..." invited submission to *JLT*
- [38] P.Minzioni, "Nonlinearity compensation in a fiber optic link by optical phase conjugation", *Fiber and Integrated Optics*, **28**, 3, 2009
- [39] P. Rosa et al., "Signal power asymmetry optimisation for optical phase conjugation using random DFB laser ...", submitted to *ACP2015*
- [40] G. Liga et al., "On the performance of multichannel digital backpropagation in high-capacity long-haul optical..." *Opt. Express* **22**, 2014

Original data for this work is separately available with a CC BY-NC-SA licence through Aston Research Explorer (<http://dx.doi.org/10.17036/8b015441-c598-4c50-a4c6-6ae62e58ebc7>).